





BY  **HIDROMAS**


TELESCOPIC CYLINDER TECHNICAL INFORMATION

DCV 3B-140L (TM)

PRODUCT CODE: DCV36001062

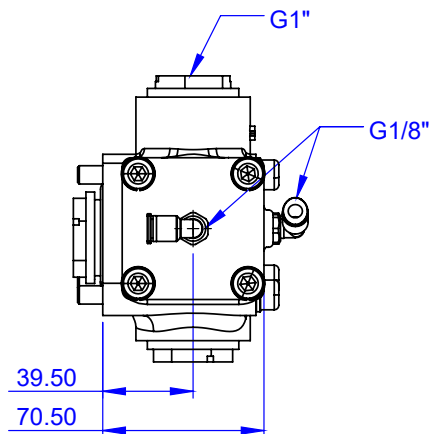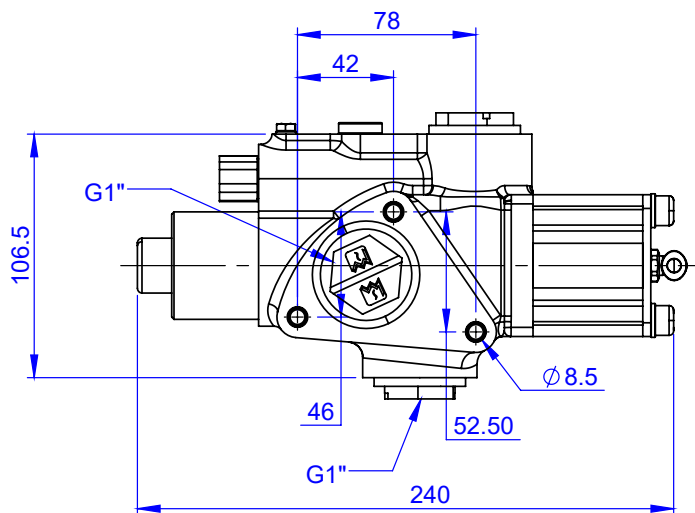

SCHEMATIC DIAGRAM

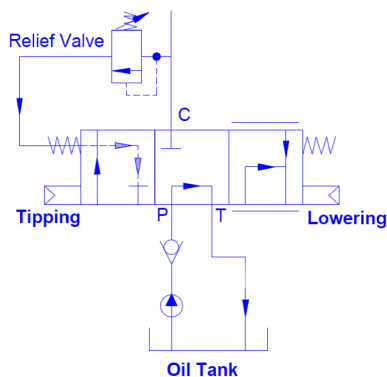

Pneumatic Connection Of
Air Control-Lowering

Cylinder Connection (C)


Pressure Gauge Point

Tank Connection (T)

Relief Valve

Pneumatic Connection Of
Air Control-Tipping

Pump Connection (P)



Specifications			
Flow Rate	Q	l.p.m	140
Working Pressure	P1	bar	170
Max. Working Pressure	P2	bar	190
Max. Peak Pressure	P2	bar	250
Pneumatic Operating Pressure	P3	bar	6~10 (8 bar is ideal)
Oil Type	-	-	Mineral Oil (DIN 51524 /51525)
Oil Temperature	T	°C	-25~80
Recommended Oil Viscosity	V	cSt	12~100
Filtration	-	μ	≤ 25 (ISO 18/13)
DCV Type	-	-	Pressureless bypass in neutral position
Paint	-	-	RAL 7024 Thickness 25±5μ
SST / ASTM B117	-	-	Min 240 Hrs

